


REV. 1: REDUCED MINIMUM DRIVEWAY OPENING
 AT STREET FROM 20' MIN. TO 16' MIN.
 REV. 2: ADDED NOTE 5

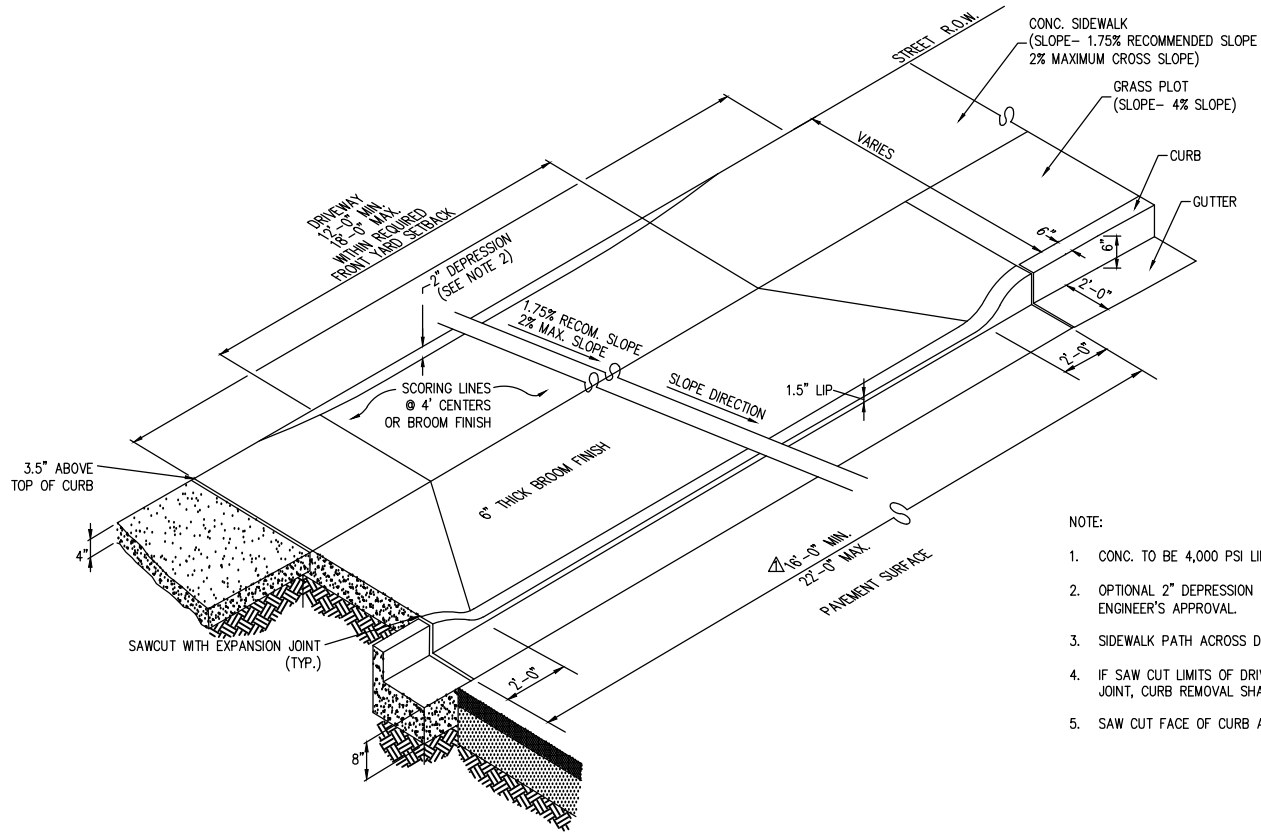

- NOTE:
1. CONC. TO BE 4,000 PSI LIMESTONE MIX, 5% AIR ENTRAINED, 6" THICK.
 2. OPTIONAL 2" DEPRESSION FOR STEEP, DOWNHILL DRIVEWAYS, WITH TOWN ENGINEER'S APPROVAL.
 3. SIDEWALK PATH ACROSS DRIVE APRON SHALL BE ADA COMPLIANT.
 4. IF SAW CUT LIMITS OF DRIVEWAY ARE 2' OR CLOSER TO AN EXISTING CONCRETE JOINT, CURB REMOVAL SHALL BE TAKEN TO THE JOINT.
 5. SAW CUT FACE OF CURB AND ADD EXPANSION JOINT AT EACH END OF CURB CUT.

DRAWN		
ENGR.		
REV.	DATE	APPROVED
1	04/17/18	TOA
2	12/03/19	TOA

TOWN OF ARLINGTON
 Public Works Standard Details

RESIDENTIAL DRIVEWAY
 TYPICAL SECTION



DATE
APPR.
DWG. NO.